YAY Ltd.

DENTAL
SUPPLIES

yayltd.co.uk
Liverpool, United Kingdom

Dental Handpieces

High-speed and low-speed handpieces, contra angles, air polishing, curing and surgery units — with the cartridges, gears and spare parts that keep them running.

01 Free retraction series
02 High-speed handpieces
03 Low-speed handpieces and motors
04 Contra angles and straight handpieces
05 Endodontic handpieces and cutters
06 Air polishing and whitening
07 Curing lights
08 Implant and surgery units
09 Scaling and piezo units
10 Cartridges and rotors
11 Gears, caps and heads
12 Couplings and spare parts

2026 EDITION · 51 PAGES

Order codes and technical data throughout.

EMAIL info@yayltd.co.uk
PHONE +44 7874 314076

Free Retraction Series




Core Advantages



hole machine

It prevents blood, saliva and other foreign impurities from entering the handpiece, prolongs the service life of the bearing and reduces the risk of contamination.



2 ts

Impo rings

1 Se stop

Curve peller

Free retraction series

TM-T7S

结构。



Self-illuminating


Circular shadowless multi-light




TM-T7S-R

Curved air impeller, optimized airflow structure.






Head size

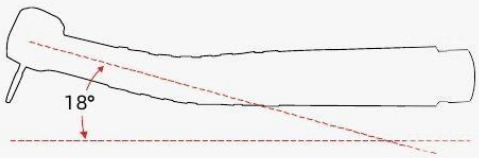

Ergonomically designed angle



Technicals

Model	TM-T7S	Air pressure	0.3MPa
Net Weight	62g	Chuck type	Push button
With Light or Not	With Light	Bur	Φ1.58-Φ1.6mm
Spray Mode	4 water spray	Noise	≤60dp
Rotating Speed	≥340.000 RPM	Connector	2/4 holes

Free retraction series

TM-T7KL



TM-T7KL-R

TM-KL2 TM-KL4 TM-KL6


TM-T7NL



TM-T7NL-R



TM-NL2 TM-NL4 TM-NL6



Technicals

Model	TM-T7KL, TM-T7NL	With Light or Not	With fiber optic
T7KL Net Weight	70.6g	Air pressure	0.3MPa
T7NL Net Weight	55g	Chuck type	Push button
Spray Mode	4 water spray	Bur	Φ1.58-Φ1.6mm
Rotating Speed	≥340,000 RPM	Noise	≤60dp

Free retraction series

TM-T7L



TM-T7L-R

TM-T7



TM-T7-R



Technicals

Model	TM-T7L	Model	TM-T7
Net Weight	61.2g	Net Weight	48.2g
With Light or Not	With Light	With Light or Not	Without Light

TM-T7L & TM-T7			
Spray Mode / 喷雾方式:	4 water spray	Air pressure	0.24MPa(T7) 0.3MPa(T7L)
Rotating Speed	≥340,000rpm	Chuck type	Push button
Noise	≤60dp	Bur	Φ1.58-Φ1.6mm

Half free retraction series

TM-X1L



TM-X1L-R

TM-X1



TM-X1-R



Technicals

Model	TM-X1L	Model	TM-X1
Net Weight	72g	Net Weight	51.4g
With Light or Not	With Light	With Light or Not	Without Light

TM-X1L & TM-X1			
Spray Mode / 喷雾方式:	4 water spray	Air pressure	0.24MPa(X1) 0.3MPa(X1L)
Rotating Speed	≥340,000rpm	Chuck type	Push button
Noise	≤60dp	Bur	Φ1.58-Φ1.6mm

Half free retraction series


TM-8000T



TM-8000T-R

TM-A0021A





TM-A0021A-R

Max Speed:

- **Standard Head**
  350,000-380,000rpm
- **Large Head** 大头:
  320,000-350,[illegible]rpm

Technicals

Model	TM-8000T	Model	TM-A0021A
Net Weight	65.2g	Net Weight	53.7g
With Light or Not	With fiber optic	With Light or Not	SMD LED bulb
Spray Mode	4 Water spray	Spray Mode	3 Water spray
Rotating Speed	≥340,000rpm	Rotating Speed	≥340,000rpm


TM-X1L & TM-8000T

Air pressure	0.3MPa	Bur	Φ1.58-Φ1.6mm	Chuck type	Push button	Noise	≤60dp

Anti - retraction Handpiece



TM-T1L-R




Head size



Four water spray **TM-T1L**



TM-T4E-R




Head size



Single water spray **TM-T4E**



TM-T5E-R




Head size



Five water spray **TM-T5E**



TM-T6E-R




Head size



Single water spray **TM-T6E**



TM-T1-R




Head size



Single water spray **TM-T1**



TM-T2-R



Head size



Single water spray **TM-T2**

Handpiece for student



TM-A0001-R



Without light





Single water spray **TM-A0001**

TM-A0005-R

Without light





Three water spray **TM-A0005**



TM-A0017-R



Without light





Single water spray **TM-A0017**

TM-A0018-R

With light




Single water spray **TM-A0018**



TM-A0021B-R



With light






Three water spray **TM-A0021B**



TM-A0023-R



Shadowless lamp





Five water spray **TM-A0023**

Handpiece for student



TM-95L-R



With light



Single water spray **TM-95L**

Set series



TM-STD-K1



TM-STD-K2



TM-STD-K3

TOP series

TOP ACTIVATOR


TOP ACTIVATOR Endo activator

Flexible Tips Autoclavable

3 Programs High,Low,MTA

High Frequency



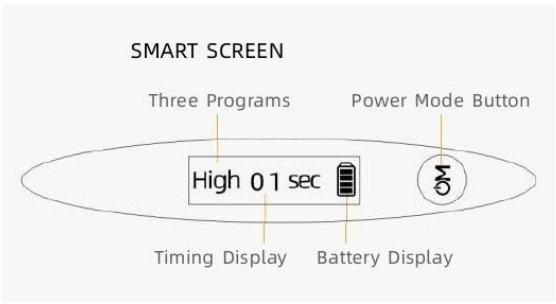

3 Programs



High:
Stror _ flushing force



Low:
Soft eaning power



MTA:
Liqu circulation activation

Technicals:

Model:	TOP ACTIVATOR	Motor:	Sonic motor
Battery	ICR14500 3.7V,800mAh	Working Frequency	500Hz(30,000rpm)
Charger power supply	AC100~240V,50/60Hz	Weight/Box:	386.5g



Medium (25/04)*30



Small (15/02)*30



USB cable



Packing Box

TOPCURE X

TOPCURE X One Second Curing Light

2700mW/cm²
Up to 2700mW/cm² per second.


Four working modes

360°
The head can rotate 360 degrees.





Easy to operate

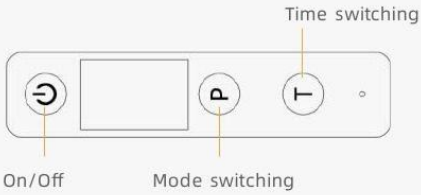

Technicals:			
Model:	TOPCURE X	Output voltage	5V 1A
Battery	2200mAh,lithium-ion,D.C3.7V	Light intensity	≥1500mW/cm²,≥2500mW/cm²
Input voltage	AC 220V	Light wave length:	385-515nm


Four working modes:	
One second cure: (1s/3s/5s)	High mode: (5s to 40s)
Ramp mode: (5s to 40s)	Pulse mode: (5s to 40s)



TOPCURE X-H



TOPCURE X-B



Light shielding sheet



Power adapter & USB cable

TOP MOTOR 2 .

TOP MOTOR 2 Touch Screen Electric Motor



External electric motor



Connectable to dental chair for operation.

Built-in electric motor

1.
Touch screen operation, convenient and simple

2. E
With LED handpiece, ,can use with all E type straight head and contra angle.

3. 2500rpm
Maximum speed up to 2500rpm

4.
Compact size, complete functions

External electric motor:			
Model:	TOP MOTOR 2	Input voltage:	AC 100~240V 50/60Hz
The operation mode	Intermittent operation	Output voltage	DC 30~36 V
Speed:	2000-40000r/min Adjustable	Output current:	2000 mA

Built-in electric motor:			
Model:	TOP MOTOR 2	Max torque	>1N.cm
Working mode	Forward/reversing	Work air pressure	2-4kgf/cm²
Speed	2000-40,000r/min Adjustable	Power supply	Input: 24V Current: 2.5A(MAX)



External electric motor



Built-in electric motor



With LED



2/4-hole connection

TM-PRK-E Prosthetic kit

Technicals

1. Torque wrench: 10-70Ncm
2. Short drivers: 11mm
3. Long drivers: 16mm
4. Adapt to different implant systems.
5. 135℃ autoclavable,the box can als be sterilized.

1. 10-70Ncm
2. 11mm
3. 16mm
4.
5.



1.0 Hex | Ankylos

⬢	1.27 Hex	Dentium, Cortex, Adin, Camlog
⬢	1.4 Hex	Icx
✶	NOB	Nobel, Basic
✶	ITI	ITI, Straumann



Air abrasion master


Features

1. Metal/Porcelain crowns,fiber posts,inlays orthodontic brackets and brackets with existing cement removed.
2. Patented nozzle design allows rotation in 360° and easy removal for autoclaving.
3. High quality stainless steel material.

1.
2. 360°
3.



Order code(编号)
TM-F00



2/4 holes



Order code(编号)
TM-F00

Nozzle angles	Tip sizes	Nozzle angles
60°	.048	
Stainless steel & Carbide		High efficiency

TM-SGT04 nch

Technicals

Micro screw drive for implants: Precision-engineered for micro screws
Length of drivers: 62mm±10%, 100% Top quality, 135°C autoclavable

62mm±10% 100% ; 135°C

●	0.9	FRI	Fri
●	1.0	ANK	Ankylos
●	1.2	3i	Osstem, 3i, Megagan, Sic, Anthogyr, Alpha-bio, Dio-UF, Biodenta, Bego, Neobiotech, B&Bdental
●	1.27	AST	Dentium, Dentis, Camlog, Astra, Zimmer Mis, Cortex, Adin, Biohorizon
●	1.4	ICX	Icx
●	NOB	NOB	Nobel
●	SPI	SPI	Spi
●	ITI	ITI	ITI, Dio-SM



TOPEX Apex Locator

Features



1. The sixth generation touch screen apex locator, with 99% high accuracy.
2. Rechargeable, with large capacity battery.
3. Equipped with clear bright LCD.
4. Autoclavable file clip, file hook, file probe.
5. Automatic calibrating ensures the measurements are accurate.



Technicals

Power supply	Input: AC 100-240V,Output: 5V,1A
Screen	4.5" LCD
Weight	220g
Package Size	140mm*90mm*17mm

Accessories



TOPEX II Apex Locator

Features



1. Accurate measurement, touch screen operation, simple and intelligent.
2. Equipped with clear and bright LCD display.
4. Autoclavable file clip, file hook, file probe.
3. High testing accuracy, widely used in different oral environment
5. Small size,big ability.The measurement is not affected by the types of teeth.
6. The continuous alarm will sound when the distance between the file and the apex is less than 2mm.



Technicals

Power supply	Battery AAA *3/4.5V
Screen	3.5" LCD
Weight	350g (without Battery)
Package Size	150mm*95mm*85mm

Accessories




TOP
TOP Series Anesthesia Injector

Wireless · Music Relaxation· 3-Speed Control

1.
3-Speed gears(HIGH,LOW,PDL)
for precise dosage control.

2.
Dynamic pressure feedback
for uniform injection.

3.
Music mode to relax patients
during treatment.

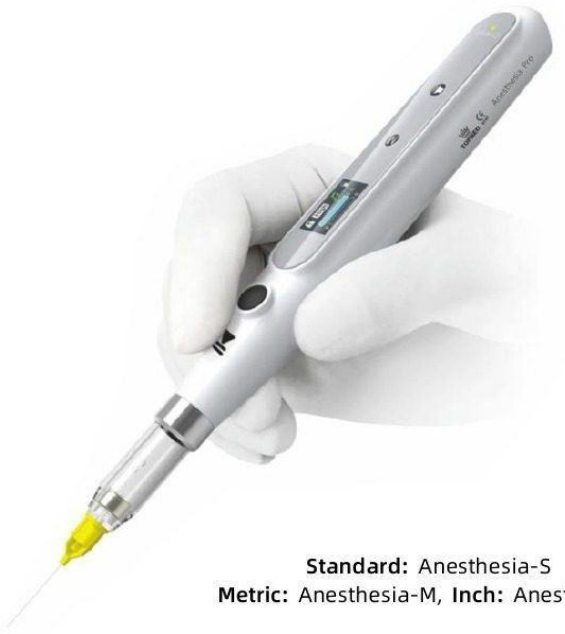

Standard: Anesthesia-S
Metric: Anesthesia-M, **Inch:** Anesthesia-I

Gears	Single anesthetic injection time	8 replaceable injeltion tubes auailabie:
High	50~70s	Thread options:
Low	130~170s	
PDL	200~280s	Inch(A) Metric(B)



Aspiration Safety · Precise Dosage · Dual-Volume Fit

1.
Uniform injection with aspiration,
to avoid the risk of blood entry.

2.
3-Speed gears(HIGH,LOW,PDL)
for precise dosage control.

3.
Dynamic pressure feedback
for uniform injection.



Standard: TOP INJECTOR-S
Metric: TOP INJECTOR-M, **Inch:** TOP INJECTOR-I

Gears	Single anesthetic injection time		8 replaceable injeltion tubes auailabie:
	1.7ml	2.1ml	Thread options:
High	60	75	
Low	145	180	
PDL	240	285	Inch(A) Metric(B)



20 : 1 Fiber optic contra angle (20:1

Order code

TM-XSG20L



TM-XSG20L-C Cap	
TM-X L-R Rotor(机芯)	
TM-XSG20L-M Middle gear	

20 : 1 Self- illumination LED contra angle (20:1

Order code

TM-DSG20E



TM- 20E-C Cap(后盖)	
TM-D E-R Rotor(机芯)	
TM-DSG20E-M Middle gear	
TM-D E-H Head(机头)	

20:1 Fiber optic contra angle (20:1

Order code

TM-DSG20L



TM- 20L-C Cap(后盖)	
TM-D Rotor(	
TM-DSG20L-M Middle gear	
TM-D L-H Head(机头)	

20:1 20:1 Implant contra angle (20:1

Order code

TM-SG20

TM-SG20-C Cap	
TM-S Rotor(机	
TM-SG20-M Middle gear	
TM-SG20-H Head(机头)	
TM-SG20-G Ration gear	



20 : 1 20:1 Implant contra angle (20:1

Order code

TM-SG20B

TM-SG20B-C Cap	
TM-S -R Rotor(机芯)	
TM-SG20B-M Middle gear	
TM-S Head(	
TM-SG20B-G Ration gear	



20 : 1 20:1 Implant contra angle (20:1

Order code

TM-XSG20

TM-XSG20-C Cap	
TM-X -R Rotor(机芯)	
TM-XSG20-M Middle gear	



Surgical handpiece



TM-S10
Burapplicable≈45mm/70mm
≈45mm/70mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S02
B .e 100mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S06
B e 45mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S01
B e 70mm
70mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-SGR1
Tips:
1): TM-S 1-T1
2): TM-SGR1-T2
3): TM-SGR1-T3

TM-SGR2
Tips:
1): TM-S 2-T1
2): TM-SGR2-T2

TM-SGR3
Tips:
1): TM-S 3-T1
2): TM-SGR3-T2



TM-S11
B le≈45mm/70mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S09
B e 45mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S08
B e 100mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S05
B e 45mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S03
B e 70mm
: 70mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S04
B e 45mm
:: 45mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-S07
B e 45mm
:: 45mm
Bur diameter Φ2.35mm
Φ2.35mm

TM-ER10-R
Rotor



TM-ER10-M
Middle gear



TM-I -H
Head(机头)





Order code **TM-ER10**

64 : 1 Endodontic contra angle (64:1

TM-ER64-C
Cap



TM-[illegible]-R
Rotor(转心)

TM-ER64-M
Middle gear



TM-I -H
Head(机头)







Order code **TM-ER64**

TM-ER64F-C
Cap



TM-E
Rotor(

TM-ER64F-M
Middle gear



TM-E -H
Head(机头)





Order code **TM-ER64F**

16:1 / 1:1 / 10:1 For endo motor

Accessories | 零

TM-F16R-C
Cap



TM-F[illegible]R
Rotor(转心)



TM-F16R-M
Middle gear



TM-F H
Head(机头)





Order code **TM-F16R**



Order code **TM-F16RG**



Order code **TM-F16RS**



Order code **TM-F11R**



Order code **TM-B0010**

1:5 Increasing contra angle 1:5

TM-T95L-C
Cap

TM-T R
Rotor(机心)

TM-T95L-M
Middle gear



1:5 1:5 Fiber optic contra angle **TM-T95L**

TM-T95-C
Cap

TM-T
Rotor(机心)

TM-T95-M
Middle gear



1:5 1:5 Contra angle **TM-T95**

TM- -C
Cap(后盖)

TM-M R
Rotor(机心)

TM-M95L-M
Middle gear



1:5 1:5 Fiber optic contra angle **TM-M95L**

TM- -C
Cap(后盖)

TM-M
Rotor(机心)

TM-M95-M
Middle gear



1:5 1:5 Contra angle **TM-M95**

TM- -C
Cap(后盖)

TM-Z R
Rotor(机心)

TM-Z45L-M
Middle gear



1:4.2 1:4.2 Fiber optic contra angle **TM-Z45L**

TM- C
Cap(后盖)

TM-Z
Rotor(机心)

TM-Z45-M
Middle gear



1:4.2 1:4.2 Contra angle **TM-Z45**

1:1
1:1 Series

1. E
E-type connect with air motor.

2. 1:1 40,000 min^{-1}
1:1 direct drive max speed: 40,000 min^{-1}



TM-X25L TM-X25

Accessories

TM-X25-C
Cap



TM-›
Rotor(机芯)



TM-X25-M
Middle gear



Straight handpiece(1:1

Order code
TM-65L





Order code
TM-65





Order code
TM-65LS
(With water pipe)





Order code
TM-65S
(With water pipe)





Gear ratio:	1:1	Rotation speed:	40,000 rpm
Bur applicable:	Φ2.35mm	Air pressure	0.22-0.25 MPa
Chuck type	Push button	Noise:	≤60 db

TOP IPR — Electric wireless IPR system

Accessories



1:1 contr
(1:1



15HD 25HD 40HD 60HD 90HD

Features

1. 6 Program
2. Eight frequency ranges
   2000HZ, 4000HZ, 6000HZ, 8000HZ, 10000Hz,
   12000HZ, 14000Hz, 16000Hz
3. High efficiency, high precision
4. Battery 3.7V/1500mAh



Up a ment

1:1/4:1 — Reciprocating interproximal stripping contra angle

Accessories

TM-R R
Rotor



TM-RA41-M
Middle gear



TM-F H
Head





Order code
TM-IPR1-K1
TM-IPR4-K1



Order code
TM-IPR1-K2
TM-IPR4-K2




15HD 25HD 40HD 60HD 90HD
TM-RA41-S



TM-RA41-K



TM-RA41-Ruler



TM-RA41-S1

TM-RA41-T

TM-RM41-H

Up a ment




Order code
TM-RA41

TM-FX External low speed handpiece set

1. 25,000 min/rpm
Max Sapeed: 25,000 min/rpm

2. Φ2.35mm
Push buton head for CA burs (Φ2.35)



2/4 Holes





Order code : TM-FX-K2 /TM-FX-K4

Accessories

TM-FX23-C Cap	
TM-FX23-R Rotor	
TM-FX23-M Middle gear	
TM-FX23-H Head	

External contra angle

Order code
TM-FX23



Exte al Ke



External Straight handpiece

Order code
TM-FX65



External air mo

编号)

2/4 Holes



TM-203 External low speed handpiece set

Accessories

TM-
Cap

TM-EC-R
Rotor

TM-EC-M
Middle gear

TM-EC-H
Head



TM-203-B2 / TM-203-M4



TM-203T-B2 / TM-203T-M4



(Silvery **TM-203-S**

Contra angl: **TM-EC-S**
St ight hea **TM-ES-S**
Air motor: **TM-EM-S 2/TM-EM-S-M4**



(Pink **TM-203-P**

Contra angl: **TM-EC-P**
St ight hea **TM-ES-P**
Air motor: **TM-EM-P 2/TM-EM-P-M4**



(Purple **TM-203-P1**

Contra angl: **TM-EC-P1**
St ight hea **TM-ES-P1**
Air motor: **TM-EM-P1 32/TM-EM-P1-M4**



(Green **TM-203-G**

Contra angl: **TM-EC-G**
St ight hea **TM-ES-G**
Air motor: **TM-EM-G 2/TM-EM-G-M4**



(Blue **TM-203-B**

Contra angl: **TM-EC-B**
St ight hea **TM-ES-B**
Air motor: **TM-EM-B 2/TM-EM-B-M4**



(Black **TM-203-B1**

Contra angl: **TM-EC-B1**
St ight hea **TM-ES-B1**
Air motor: **TM-EM-B1 32/TM-EM-B1-M4**

TM-BB Ball bearing contra angle

Accessories

TM-BB-C Cap(帽)		
TM-I Rotor(机心)		High speed bearing 2.78
TM-BB-M Middle gear		
TM-BB-H Head		



TM-EC Oil contra angle

Accessories

TM-EC-C Cap(帽)		
TM-EC-R Rotor		
TM-EC-M Middle gear		
TM-EC-H Head		



TM-EM External low speed air motor



2 holes(2

Order code(编号)
TM-EM-



4 holes(4

Order code(编号)
TM-EM-



TM-ES External straight handpiece

External straight handpiece





Order code : TM-ES-1



Order code : TM-ES-2

External straight handpiece (With pipe)






Order code : TM-ES-1S



Order code : TM-ES-2S

TM-IS-S Inner straight handpiece with water pipe



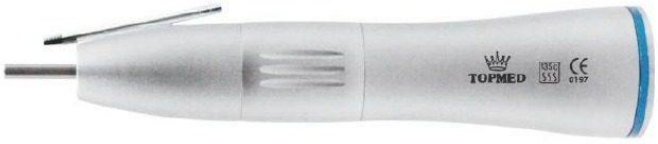

TM-FPB Push button contra angle



Accessories

TM -C Cap(后盖)	
TM-I ? Rotor(机心)	
TM-FPB-M Middle gear	
TM-FPB-H Head	

TM-FPB-B Push contra angle ´B



Accessories

TM -B-C Cap(后盖)	
TM-I 3-R Rotor(机心)	
TM-FPB-B-M Middle gear	
TM-FPB-B-H Head	

TM-IC-S Inner contra angle with water pipe



Accessories

TM-IC-S-C Cap	
TM-IC-S-R Rotor	
TM-IC-S-M Middle gear	
TM-IC-S-H Head	

TM-205 Inner low speed handpiece set

Accessories

TM-IC-C
Cap



TM-IC-R
Rotor



TM-IC-M
Middle gear





Order code(编号
TM-205-M4 / 5-B2



(Purple **TM-205-P**

Contra angle: **TM-IC-P**
Straight heac **TM-IS-P**
Air motor:**TM-IM-P- !/TM-IM-P-M4**



(Green **TM-205-G**

Contra angle: **TM-IC-G**
Straight heac **TM-IS-G**
Air motor:**TM-IM-G- ?/TM-IM-G-M4**



(Blue **TM-205-B**

Contra angle: **TM-IC-B**
Straight heac **TM-IS-B**
Air motor:**TM-IM-B- !/TM-IM-B-M4**



(Silvery **TM-205-Y**

Contra angle: **TM-IC-Y**
Straight heac **TM-IS-Y**
Air motor:**TM-IM-Y- !/TM-IM-Y-M4**



TM-IC

Internal low speed
contra angle



TM-IS

Internal low speed
straight handpiece



TM-IM-B2 / TM-IM-M4

Internal low speed air motor

TOP
TOP Series Implant Motor

1.
Lighted handpiece for clear surgical vision.

2.
Smart touch screen with sensitive response.

3.
Multifunctional & adaptable to multiple scenarios.

TOP SURG



TOP SURG B



TOP SURG 4



TOP SURG / TOP SURG B / TOP SURG 4		
Touch screen operation.		
		Includes implant, repair, impacted tooth extraction and orthopedic surgery.
8	10	8 program modes, compatible with 10 different speed ratio contra angles.
		Automatic memory storage for surgical parameters.


Compatible contra angles:
Implantation: 20:1, 27:1, 16:1
Restoration & impacted tooth extraction: 1:1, 1:3, 1:4.2, 1:5
Orthopedic surgery: 3.2:1, 4:1

TOP PIEZO

LED touch screen piezo surgery unit

Features

1. Multi-function in one. Includes osteotomy, periodontal, root canal and cleaning functions.
2. Touch screen,responsive, no viewing angle limitations.
3. 4 programme modes to match 6 different working tips.
4. Surgical parameters can be automatically stored in memory.
5. Multi-function foot pedal, ultrasonic start/stop, smooth control.

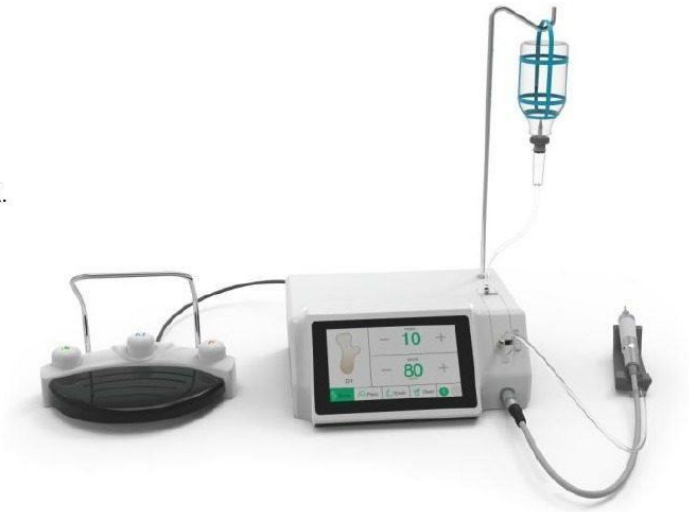

Technicals

Main unit	Supply voltage	AC 100-240V
	Power frequency	50/60Hz
	Input power	150VA
Ultrasound handle	Operating frequency	24kHz~36kHz
	Water flow	30~110ml/min

TM-SGT03 [illegible]nch

Technicals

Micro screw driver for implants: Precision-engineered for micro screws
Length of drivers: 76mm±10%; 100% Top quality,135°C autoclavable

76mm±10% 100% ; 135°C

	0.9	Xive
	1.0	Ankylos
	1.2	Osstem, DIO, 3i, C-Tech, ICM, Megagen, T-Plus
	1.25	Cortex, Ticare, ABT, Zimmer
	1.27	Dentium, Dentis, BEGO, Astra, MIS, Alpha, Biotec, Biohorizon, Camlog, Antmed
	1.4	Icx
	NOB	Nobel, Basic Omni-Tight, DentalMaster
	ANT	ANT
	ITI	Straumann, Trausim, Bioconcept



TM-SGT05 [illegible]nch

Chuck type



Key type






TM-SGT01 [illegible]nch

Packaging options: Aluminum box / Paper box





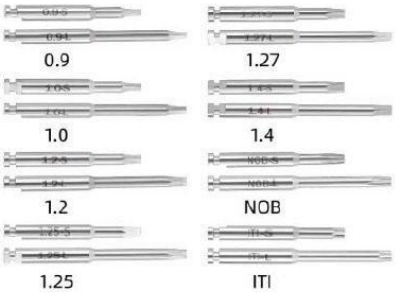




Coloroptional | [illegible]:



Technicals

Precision	±1 N.cm
Head	Latch type,detachable
Torque setting	From 5 to 35 N/cm
Material	Aluminum
Packing size	25cm*15cm*10cm

TOP WRENCH Top wrench Top [illegible]

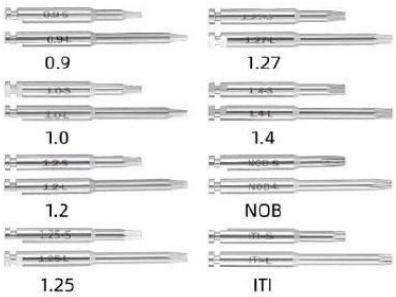



Features

1. Max torque,FWD 50N.cm, REV 55N.cm
2. Imported motor, with 16 drivers
4. Torque speed is accurate, stable, safe and efficient.
5. The contra-angle can be autoclaved at high temperature and pressure.

1. [illegible]FWD 50N.cm， REV 55N.cm
2. [illegible] 6[illegible]
3. [illegible]
4. [illegible]





Technicals

Battery（电池）	3.7V/1400mAh
Charge[illegible]	DC 5.0V
Speed ([illegible]	10~50rpm
Torque[illegible]	06~55N.cm
Packing[illegible]	78*213*77 mm

Endo Motor With LED Light

Automatic rotary file retraction at preset torque until resistance is cleared.

9
9 operator-customizable preset programs.

135℃
Contra-angle, file clip and lip hook autoclavable at 135 °C



TM-EDM1-2
90×188×85mm



TM-EDM1
107×191×82mm

Technicals:

Model:	TM-EDM1 / TM-EDM1-2	Power:	DC 5V /1A
Speed	140-550rpm	Input voltage	AC100-240V 50/60Hz
Torque	0.3-4N.cm	Output voltage	DC 5V/MICRO USB
Battery	950mAh	Weight/Box	457g±5%



16:1
16:1 contra angle head



With LED light




Spare parts



EU/US plug

TOP 7 &
TOP MOTOR 7 & TOPEX 7

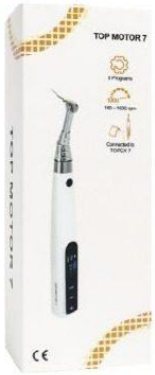



When connected together, the TOP MOTOR 7 can auto on-off.

TOPEX 7 & TOP MOTOR 7 connecting can activate the function of measuring while expanding.



TOP MOTOR 7
80×215×73mm/box

TOPEX 7
143×105×87mm/box

Model:	TOP MOTOR 7	Battery:	3.7V/1500mAh	Torque:	0.6-4.0N.cm
Speed	150-1000rpm	Power	DC 5.0V/1A	Weight	418.6g
9 programs (P1~P9), 4 modes: FWD, REV, REC, ATC				Colorful OLED screen	
Compatible with TOPEX 7, enables measurement during root canal preparation				Built-in multiple file systems	

Model:	TOPEX 7	Battery:	3.7V / 800mAh
Net weight	341g	Autoclavable	file clip,lip hook,file probe
Buzzer alerts when file is within 2mm of the apex		TOP MOTOR 7 / Connected to TOP MOTOR 7	
99% / Advanced multi-frequency apex location with auto-calibration, 99% measurement accuracy			



TOP MOTOR 7



Accessories for TOP MOTOR 7



TOPEX 7

Accessories for TOPEX 7

TM - EDM 2

Endopex plus
2 in 1



Apex locator &
endodontic treatment



198 × 124 × 90mm/box



Features

1. Multi-frequency root canal length measurement, integrated with length measurement & preparation functions.
2. Colorful OLED display.
3. Four working modes.
4. Built in different File systems.
5. Seven functions.
6. 360° freely rotatable contra-angle.
7. The main accessories could be sterilized in high temperature and pressure to avoid cross infe.

Technicals

Battery	3.7V/1400mAh
Power	DC5V/1A
Revolving speed	150-1000 rpm
Torque	0.6-3.9N.CM
Weight	110g

TM - EA-2

Endo activator



TM-EA-2-T1
Endo activator
Threaded needle 21mm*3
21mm×3



TM-EA-2-T2
For broken file remove
Polished pin 21mm*3
21mm×3



Features

1. Activate irrigants in root canal via 30-60s vibration for optimal cleaning.
2. 40,000Hz vibration frequency generates cavitation and acoustic streaming in irrigant.
3. Vibrate 20 seconds per time.

Technicals

Battery	1500mAh
High frequency	40,000Hz
Output power	3W
Sterilized	134℃/0.22MPa for 3min
Weight	382g
Size /box	205×97×75

TOP PROPHY TOP PROPHY

Features

1. Wireless handpiece,easy operation.
2. 6 With 6 speed ranges:
   500rpm, 1000rpm,1500rpm,2000rpm,2500rpm, 3000rpm



Technicals

Battery	3.7V/1500mAh
Charger	DC 5.0V
Speed	500~3000rpm
Package weight	341g
Handpiece weight	120g

TOP LOUPE TOP Loupe

Features

1. Optional 2.5X/3.5X magnification.
2. Rechargeable lithium-ion battery.
3. Lightweight & durable frame made of Ni-alloy or titanium.
4. Up to 5 hours of continuous illumination on a full charge.

Magnifcation	2.5X	3.5X
working distance	320-500mm	320-500mm
Field of vision（视野）	100mm	60mm
pepth of visio..	90mm	80mm



Technicals

Bulb: 3W/5W	Illumination: 1500-30,000Lux
Bulb lifespan:10,000h	Input voltage: AC100-240V 50-60Hz

TM-RH2 Heater

Technicals

1. Adopting precise circuit control and imported heating tube.
2. it can set any integer temperature within 40-70℃
   according to the heating object.

40-70℃

Material	Recommen era-ture(℃,
Resin (for filling)	39
Resin (for bonding)	55
Branscan	38
Agar film	Melting 99; Insulation 60
Sodium hypochlorite	60



TOP
TOP Series Curing Light



1.
Efficient curing in one second.

2.
High-power light intensity output.

3.
Multi-mode intelligent operation.

Battery type



TM-TOPCURE
stand-alone use

USB plug type





TM-TOPCURE B-U
TM-TOPCURE B-E

Available with EU/US standard plug

Wired type



TM-TOPCURE B-24V

24V Dental Chair End Wiring

TOPCURE / TOPCURE B Working models	
One second cure: (1s/3s/5s)	It will immediately continue to output ≥2500mW/cm² strong light
High mode: (5s to 40s)	≥1500mW/cm² strong light will be continuously output
Ramp mode: (5s to 40s)	The light intensity gradually increases to ≥1500mW/cm²
Pulse mode: (5s to 40s)	It will fash once every second,and the light intensity is >1500mW/cm²

Technicals:			
Model:	TOPCURE / TOPCURE B	Light intensity	≥1500mW/cm²,≥2500mW/cm²
Battery	2200mAh (Only TOPCURE	Light wave length	385-515nm
Input voltage	AC 220V	Output voltage	5V 1A

Ultrasonic Scaler





TM-3HK
Without light



TM-5LK
With LED optical

1. 28-34KHz
28-34KHz high frequency
with adjustable intensity

2.
Detachable design for
effective cross-infection prevention

3.
High-quality PU tubing,
deformation-resistant & aging-resistant

4.
Compatible [illegible] cker,
One-year warranty

External electric motor:			
Model:	TM-3HK / TM-5LK	Adapter Input:	AC 100~240V 50/60Hz
vibration frequency	28kHz-34kHz	Main unit input	DC 30~36 V
Water pressure:	≤0.3MPa	Main unit fuse:	2000 mA
Output power	3W to 20W	Main tip vibration amplitude	≤100μm
Operating mode	Continuous operation	Net weight	1.35Kg ±50g
Output half-excursion force	2N	Packaging size	310×170×105mm



Detachable handle



Smaller packing



Universal accessories

TOP Series



With LED
TM-5LK-B



With LED
TM-5LK-B1



Without ligh
TM-3HK-B



TM-ASK-B2
TM-ASK-M4



TM-ASA-B2
TM-ASA-M4



TM-AS2000-B2
TM-AS2000-M4



TM-3H



TM-5L



TM-5L-2



TM-7H



TM-7L



TM-TL



TM-3H-C



TM-5L-C



TM-7H-C



TM-7L-C




TM-HW1
Compatible with UDS-J



TM-HD-1
Compatible to DTE



G1 G2 G3 G4

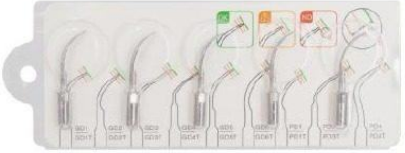

TM-tips asorted

TM-1L / key



TM-SV01
Solenoid valve



TM-SP1
SP1
scaler petal
(compatible woodpecker)

TOP RAY X


TOP RAY Portable type dental X-ray machine

2500mAh Large capacity battery

Stable ImagingX-ray System

Low Radiation Safety Protection



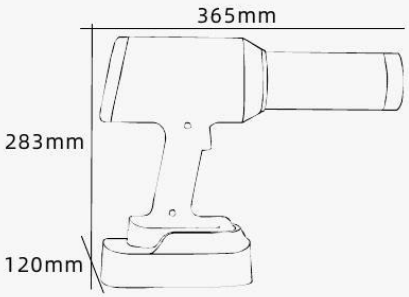

Core Technical Parameters:

Model:	TOP RAY	Tube Voltage/Current:	70kv, 3mA
Exposure Time	0.02-2s	Inverter Frequency	25kHz
Battery Capacity	22.2V 2500mAh	Charging input:	AC100-240V
Cooling Power:	110W	Focal spot to skin distance	>200mm
Facal Spot Size	0.4mm	Total Filtration:	1.8 mm Al / 75 kV
Inherent Filtration:	Min.0.8 mm Al / 75 kV	Additional Filtration:	1mm Al / 75 kV
Surface leakage radiation ≤0.25mGy/h 70kV 3mA 1s			



Main Unit



Long Collimator



Charging Base



Power Adapter
EU Pulg/US Pulg



Size/box: 36.5*29*15.3cm
Standard set weigh: 3.45kg

High speed handpiece

TM-A0002-B TM-A0002-G TM-A0002-P TM-A0002-Y TM-A0002-B1

TM-A0002




Order code **TM-A0003**





TM-A0003-R




Order code **TM-A0004**





TM-A0004-R




Order code **TM-A0005B**





TM-A0005B-R




Order code **TM-A0006**





TM-A0006-R




Order code **TM-A0007**





TM-A0007-R



Order code **TM-A0008**






TM-A0008-R

Order code **TM-A0008A**





TM-A0008A-R



Order code **TM-A0009**





Order code **TM-A0010**






TM-A0010-R

Order code **TM-A0011**





TM-A0011-R



Order code **TM-A0012**






TM-A0012-R




Order code **TM-A0013**






TM-A0013-R




Order code **TM-A0014**



TM-A0014-R



Order code **TM-A0015**





TM-A0015-R

Order code **TM-A0016**

Order code **TM-A0019**

Order code **TM-A0020**



TM-A0020-R

Order code **TM-A0021**

TM-A0021-R

TM-A0022-B TM-A0022-G TM-A0022-P TM-A0022-Y TM-A0022-B1

TM-A0022

Order code **TM-A0024**

Order code **TM-A0025**



TM-A0025-R

Order code **TM-A0026**





TM-A0026-R

TM-A0027-B TM-A0027-G TM-A0027-P TM-A0027-B1

TM-A0027





TM-A0027-R

Order code **TM-A0028**






TM-A0028-R

Order code **TM-A0029**





TM-A0029-R

Order code **TM-A0030**





TM-A0030-R

Order code **TM-A0030B**






TM-A0030B-R

Order code **TM-A0031**



Order code **TM-A0032**





Order code **TM-A0033**






TM-A0033-R

Order code **TM-A0034**








TM-A0034-R

Order code **TM-A0035**







TM-A0035-R

Order code **TM-A0036**





TM-A0036-R

Order code **TM-A0037**



Order code **TM-A0038**



Order code **TM-A0039**







TM-A0039-R

Order code **TM-A0040**



Order code **TM-A0041**








1-R

Order code **TM-600NL**

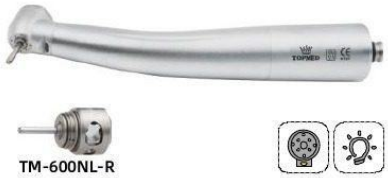


TM-600NL-R

Order code **TM-600NL2**





TM-600NL2-R



Order code **TM-600KL2**





TM-600KL2-R




Order code **TM-X600E**





TM-X600E-R



Order code **TM-45NL**





TM-45NL-R



Order code **TM-45KL**




TM-45KL-R

Order code **TM-8000B**





TM-8000B-R



Order code **TM-8000C**





TM-8000C-R




Order code **TM-8000L**





TM-8000L-R



Order code **TM-8000M**





TM-8000M-R

Order code **TM-8000M2**



Order code **TM-8000M3**



Order code **TM-9000L**






TM-9000L-R

Order code **TM-A0001QD**






Order code **TM-A0017QD**





TM-A0017QD-R



Order code **TM-A0018QD**



Order code **TM-T1E**



Order code:
TM-KL-KIT



Low speed handpiece



TM-B0001 TM-B0002 TM-B0003 TM-B0004 TM-B0005 TM-B0006 TM-B0007 TM-B0008 TM-S201L



TM-SG20 WL
20 1
20:1 Co...

T -RA41-B
1 1
1:1 Contra Angle

T -RA11-B
4 1
4:1 Contra Angle

(LED air motor)

(LED air motor)

TM-205L
Fiber optic
air motor)

TM-205M4
(Inner water
air motor)

TM-205B2
(Inner water
air motor)

TM-205M4-2
(Inner water
air motor)



TM-X16L TM-X16 TM-X4L TM-X4 TM-Z95L TM-Z95 TM-X95L TM-X95 TM-X95LS TM-X95S TM-M95L TM-Z45LS TM-Z45S



1 1-B0009
4 1
4:1 Contra Angle

1 1-B0011
1 1
1:1 Contra Angle

1 1-B0012
4 1
4:1 Contra Angle

TM- 0012A
FX57 4 1
4:1 Contra Angle

1 1-B0013
4 1
4:1 Contra Angle

T 4
Prophy air motor

T 1-B0015
16 1
16:1 Contra Angle

T -B0016
20 1
20:1 Contra Angle

T -B0017
16 1
16:1 Straight handpiece

Endo series



TM-C0001

Pulp tester



TM-C0002

Endo motor



TM-C0003

2 ^1

Endo pex 2 in1



1 3

根管马达

Endo motor



TM-C0004

Apex locator



TM-C0005

Apex locator



TM-C0006

2 ^1 +

2in1Endomotor(With apex)



TM-C0018

Endomotor



TM-C0018-B1

Endomotor



TM-C0018-B

Endomotor



TM-C0018-P

Endomotor



TM-C0019

Apex locator



TM-C0021

Endo file al

system



TM-AL-1



TM-AL-2



Pink· TM-EA-3P

Greer TM-EA-3G

Endo ac ator



TM-EA-1

Led endo activator



TM-C0022-P

Endo activator



TM-C0022-C

Endo activator



TM-C0022-B

Endo activator

Gutta cutter series



TM-C0010

Gutta cutter with battery



TM-C0011

Gutta cutter with battery



TM-C0012

Gutta cutter with battery



TM-C0013

Gutta cutter with battery



TM-C0014

Gutta cutter with battery



TM-C0016

Gutta cutter with battery



TM-C0017

Gutta cutter with battery



TM-C0024

Gutta cutter with battery

Obturation pen series



TM-C0007

Obturation system



TM-C0008

Obturation pen with battery



TM-C0009

Obturation pen with battery



TM-C0009-B

Obturation pen with battery



TM-C0015

Obturation pen with battery



TM-C0020

Obturation pen with battery



TM-C0023

Obturation pen with battery



TM-C0025-R

TM-C0025-B

TM-C0025-Y

TM-C0025-G

Air polishing & Whitening










TM-F0001 TM-F0001-O TM-F0001-W TM-F0002 TM-F0016 1) TM-F0009 2) TM-F0010

Sandblasting dust-proof box

type sand blaster







For dental unit: TM-F0011A Fortable: TM-F0011B

For dental unit: TM-F0012A Fortable: TM-F0012B

TM-F0013 TM-F0015 TM-F0017

1 One second light cure



TM-E0001 TM-E0001-W TM-E0001-P TM-E0001-Y TM-E0002-B TM-E0002-W1 TM-E0004 TM-E0005 TM-E0011

Light cure



TM-E0007 TM-E0007-W TM-E0007-Y TM-E0007-B TM-E0007-R TM-E0007-B1



TM-E0008-P TM-E0008 TM-E0008-P1 TM-E0008-B1 TM-E0008-B



TM-E0008P-B TM-E0008P-W TM-E0008P-R TM-E0008P-Y TM-E0008P-P TM-E0008P-B1 TM-E0008P-P1 TM-E0008P-B2




TM-E0009 TM-E0010




















TM-E0006 TM-E0012 TM-E0013 TM-E0014 TM-E0015 TM-E0017 TM-E0018 TM-E0027 TM-E0038 TM-E0039 TM-E0040 TM-E0041

Implant series



TOP SURG 5



TM-D0001



TM-D0006



Yk00222



TM-D0007X



TM-D0008



TM-PRK-C



TM-D0010



TM-D0011

Others



TM-G0001

machine



TM-G0002

machine



TM-G0003

Water distiller (Metal)



TM-G0004

Water distiller (Plastic)



TM-G0005

Vacuum former



TM-G0006

Amalgamator



TM-G0008

Oil lubricator



TM-G0009

Digital ultrasonic cleaner (2.5L)



TM-G0010

Wifi i l oral camera system



TM-G0016

Wifi intaoral oral camera system



TM-G0011

Portable unit with tank



TM-G0011-B

Portable unit without tank



TM-G0012

4 Ho atic dental elevator



TM-G0013

Dental surgery turbine units

TM-G0014-2.5X

2.5X

Headlight loupes 2.5X

TM-G0015-3.5X

3.5X

Headlight loupes 3.5X

TM-G0017

Mixing machine

TM-RH1

Heater

TM-G0018A

Hanging Dental Air Turbine Unit



TM-G0019A

Foldable Dental Chair (With LED & Instrument Tray)

Micro motor



TM-204



TM-S204



TM-90



TM-S90



TM-H0001



TM-C03



TM-C03S



TM-210K-E



TM-210



TM-N3



TM-N3S

Micro motor andpiece



102
35000rpm

102L
35000rpm

105L
40000rpm

SDE-H37L1
35000rpm

SDE-SH37LN
45000rpm

108E
35000rpm

108E-S
35000rpm

Accessories



Carbon
(compatible for marathon and strong)



C' k



TM-M



ng
轴承

MR126ZZ(6*4*4) 684ZZ(4*9*4)
MR148ZZ(8*14*4) MR137(7*13*4)
1030(3*10*4) MR106(6*10*3)
MR 104ZZ(4*10*4) MR128(8*12*3.5)
693ZZ(3*8*4) S640(4*6.5*1.3)

LED Electric motor





TM-96EX
LED electric motor



TM-95IN
Built-in LED electric motor



TM-95IN-S
Touch screen with built-in electric motor



TM-96W
Touch screen electric motor with water tank



TM-CH37
Electric motor holder

Apex locator accessories



TM-AP01
Compatible to most brands



TM-AP02
Compatible to most brands



TM-AP03
KAVO Sybron Endo



TM-AP04
Compa ole to DENJOY, COXO



TM-AP14
Apex accessories for whole set
Compatible to most brands



TM-AP05
Compatible to most brands



TM-AP06
Compatible Woodpecker




TM-AP07
Compatible Eight teeth



TM-AP08
Compatible Woodpecker



TM-AP09
Measuring wire
Compatible VDW



TM-AP10
Single
Measuring wire



TM-AP11
Lip hook
Compatible to most brands



TM-AP12
Touch probe
Compatible to most brands



TM-AP13
Silicone sleeve
Compatible to most brands

Catridge of high speed handpiece



TM-T1-R For NSK
T1
T1 push button type cartridge



TM-T2-R For NSK
M2
M2 push button type cartridge



TM-8000B-R For KAVO
Optical fiber super torque push button cartridge



TM-45KL-R For NSK
M3
M3 mini push button cartridge



TM-600NL-R For NSK
M3
M3 super torque push button cartridge



TM-A0010-R For NSK
Super torque key type cartridge



TM-A0011-R For NSK
Standard push button cartridge



TM-A0012-R For NSK
Super torque key type cartridge



TM-A0013-R For NSK
Standard key type cartridge

TM-A0027-R For W&H
A0027
A0027 push button cartridge



TM-X600-R For NSK
X600
push button cartridge



TM-CX-210SP For NSK
A
A cartridge

Bearing of Handpiece



TM-TWG7A
2.78mm
7-ball bearing with shield



TM-TNG7A
2.38mm
7-ball bearing with shield



TM-SNG7P4
2.38mm
7-ball bearing with shield



TM-SWG7P4
2.78mm
7-ball bearing with shield



TM-SNG7P5
2.38mm
7-ball bearing with shield



TM-SWG7P5
2.78mm
7-ball bearing with shield



TM-XNG7
2.38mm
7-ball bearing with shield

Shaft of cartridge



A 12.5 | A H9.8 | A H11.7 | A H12.7 | A H13.5 | BA1 12.7 | B H13.5 | H12.7 T7 | 12.2 | 11.5



12.5 | 13.5

Quick oupling



TM-NL2
2 Holes
quick coupling

TM-NL4
4 Holes
quick coupling

TM-NL6
6 Holes
quick coupling

TM-KL2
2 Holes
quick connector

TM-KL4
4 Holes
quick connector

TM-KL6
6 Holes
quick connector



TM-QD-M4
4 Holes
coupling QD

TM-QD-B2
2 Holes
coupling QD

TM-KQ-M4
4 Holes
coupling (KV)



TM-WL6
6 Hole fiber optice
coupling (wh)



TM-KL6-2
6 Holes fiber optic
coupling KV



TM-SL6
6 Hole quick
connector sirona



TM-S-M4
4 Holes coupling
(compatible Sirona)

TM-KQ2-M4
4 Holes coupling (KV)
water adjustalbe

TM-CH18
2-4 Adaptor



TM-CH19
4-2 Adaptor



TM-CH32
Handpiece
repair tool



TM-CH33
Handpiece
repair tool



TM-CH33B
Handpiece
repair tool



TM-CH34
Low speed
handpiece repair kit



TM-CH35
Handpiece
repair kit



TM-CH36
Handpiece
repair tool

Cartridge of low speed Handpiece



TM-XSG20L-R For NSK
201
20:1 contra angle
cartridge



TM-SG20-R For NSK
201
20:1 contra angle
cartridge



TM-ER10-R For NSK
90°
90° reciprocating rotate
cartridge



TM-ER64-R For NSK
64:1
cartridge



TM-T95L-R For NSK
1:5
cartridge



TM-Z45-R For NSK
1:4.2
cartridge



TM-X25-R For NSK
1:1
1:1 contra angle
cartridge



TM-FX23-R For NSK
Fx23
Fx23 Push button type
cartridge



TM-EC-R For NSK
Latch type
contra angle cartridge



TM-BB-R For NSK
BB
Latch type
contra angle cartridge



TM-600NL-R For NSK
FPB-B
Push button
contra angle cartridge



TM-CAR1 For NSK
Push button
contra angle rotor



TM-CAR2 For NSK
A 6*3*2
Ball bearing contra
angle rotor 6*3*2 A



TM-CAR3 For NSK
B 6*3*2
Ball bearing contra
angle rotor 6*3*2 B



TM-CAR1-2 For NSK
PY
PY ball bearing
contra angle rotor

Middle gear of low speed Handpiece



TM-XSG20L-M
20:1
20:1 Implant contra
angle middle gear



TM-SG20L-M
20:1
20:1 Implant contra
angle middle gear



TM-SG20-M
20:1
20:1 Implant contra
angle middle gear



TM-ER10-M
10:1
10:1 contra angle
middle gear



TM-ER64-M
641:1
64:1 contra angle
middle gear



TM-F16R-M
16:1
16:1 contra angle
middle gear



TM-T95L-M
1:5
1:5 contra angle
middle gear

TM-EC-M
Contra angle
middle gear



TM-BB-M
Contra angle
middle gear



TM-FPB-M
Contra angle
middle gear



TM-SG20-G
Ration gear

Head cap of low speed Handpiece



TM-XSG20L-C
Implant contra
angle back cap

TM-SG20-C
Implant contra
angle back cap

TM-ER64-C
64:1
64:1 contra
angle back cap

TM-F16R-C
16:1
16:1 contra
angle back cap

TM-T95-C
1:5
1:5 contra
angle back cap

TM-Z45L-C
1:4.2
1:4.2 contra
angle back cap

TM-X25-C
1:1
1:1 contra
angle back cap



TM-EC-C
Latch contra
angle front cap



TM-BB-C
Latch contra
angle front cap



TM-FPB-C
Push button contra
angle back cap



TM-FPB-C2
Push button contra
angle back cap

TM-CA-C1
Cap of C pusn
button contra angle

Head set of low speed Handpiece



TM-DSG20L-H
20:1 contra angle head
20:1



TM-SG20-H
20:1 contra angle head
20:1



TM-ER10-H
10:1 contra angle head
10:1



TM-ER64-H
64:1 contra angle head
64:1

TM-ER64F-H
64:1 contra angle head
64:1



TM-F16R-H
16:1 contra angle head
16:1

TM-RA41-H
IP contra angle head

TM-FX23-H
FX contra angle head
Fx

TM-EC-H
Latch contra angle head

TM-BB-H
Latch contra angle head

TM-FPB-H
Push button head

TM-F20R
20:1 Angle Head
20:1

Other parts

B
Straight handpiece locker

Air motor connector

FX2
Air motor connector

2
Air motor connector

20:1
Contra angle buckle

Lower Gear



Upper Gear



FPB
Upper Gear



FPB
Drive Spindle



Bur Chuck



Exhaust
2 holes dental turbin



Low speed handpiece
lubricator adapter



Air motor vane



Air motor vane



Air motor vane
spring



Spare Part:
Slotted Screw



FX 2
FX 2-Hole
Rubber Gasket (

YAY Ltd.

DENTAL
SUPPLIES

yayltd.co.uk
Liverpool, United Kingdom

How to order handpieces.

Orders are placed by email. Send the order codes and quantities you need, and we confirm pricing, availability and lead time by return.

1 **Give the order code**
Every handpiece, cartridge and part in this catalogue carries one. The suffix matters: it marks the light, the coupling and the gear ratio.

2 **Tell us the coupling**
Handpieces are supplied for two-hole and four-hole connections, and for the common quick couplings. Tell us which unit they are going on.

3 **Spares and cartridges**
Cartridges, rotors, gears and head caps are listed separately at the back. Order them with the handpiece or on their own.

4 **We quote individually**
Include your practice or laboratory name and the delivery address, and we return a written quotation.

Compatibility. Where a part is listed as fitting another maker's handpiece, that is a compatibility note and not a claim of origin. If you are unsure which cartridge or gear fits the handpiece you already own, send us its model number and we will confirm before you order.

Tell us what you need and we will quote.

EMAIL info@yayltd.co.uk
PHONE +44 7874 314076
WEB yayltd.co.uk

YAY Ltd · Liverpool, United Kingdom · Registered in England & Wales no. 13694448

Models and specifications subject to change. Photography shows representative items.